


High type heat expandable vehicle sound deadener with high pillar filling performance


Product overview

High type preformed pillar filler is a sound deadener based on EVA . This product is applied to the sandwich structure of the vehicle (A pillar, B pillar, wheel house, etc.), cured and expanded through E.D.coat process and perform wind noise, road noise reduction effect during driving. Especially any parts of vehicle make it easy to apply through clip and plate.

Product Model

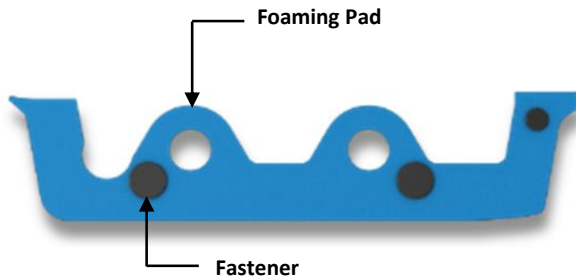

Product Model

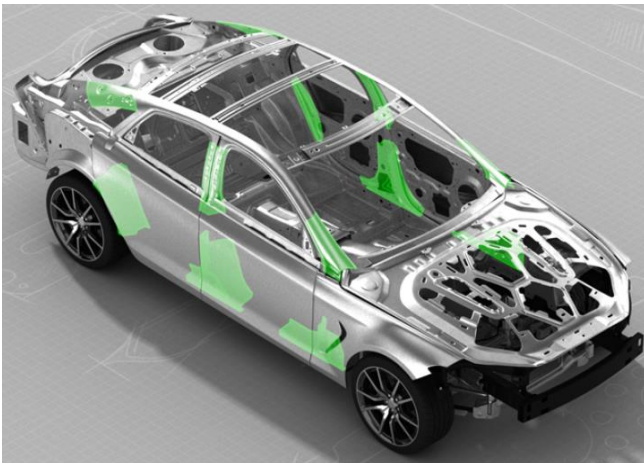

Product Category

PSN	Type
1011	A form in which an assembly clip is combined to an extrusion sheet
1013	A form in which PA66(or PA6) single plate with extruded sheet combined
1014	A form in which PA66(or PA6) double plate with extruded sheet combined
1018	A form in which combination of assembly clip and single plate in extrusion sheet

Technical Data

* Appearance	Solid
* Color	Blue
* Specific Gravity	1 ± 0.2
* Expansion(Foaming) Ratio	> 2,000(%)
* Adhesion Strength	> 0.4(Mpa)
* Operating Temperature	150~215℃, 20min

Application Method

1. Applied Fixed by using carrier's fastener on the hole of the panel.

Storage method (storage conditions)

1. Storage temperature Below 30℃
2. Validity 12 months from date of manufacture
3. This product contains a blowing agent and a curing agent before the reaction. When exposed to direct sunlight and high temperature for a long time, the self-curing reaction proceeds and deterioration of physical properties such as reduction of the foaming rate may occur early. Therefore, it should be stored away from heat sources and direct sunlight. In addition, thorough first-in-first-out is required depending on the storage period.

Additional Information

All of the above information is based on our knowledge and experience. we recommend to carry out sufficient reviews with us about using beyond technical purpose.