

It is a product for the soundproofing, dustproofing, rust prevention and waterproofing of the steel plate by heat fusion to the inner surface of FLOOR part.


Product overview

SHINSUNG's 3050 product line is ASPHALT's main product, which is an ultra-light sheet type product for the purpose of soundproofing, anti-vibration, anticorrosion and waterproofing of steel plate by heat-sealing to the inside of FLOOR part of automobile.

Product Model



Product Model

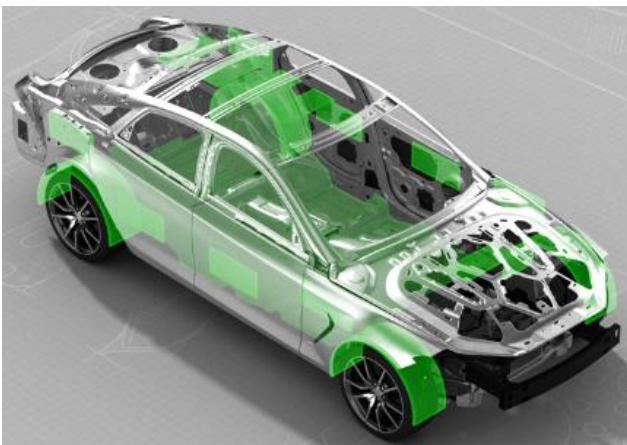

Technical Data

* Appearance	Solid
* Color	Black
* Specific Gravity	0.90 ~ 1.00
* Shrinkage Ration(%)	< 2.0%
* Thermal Flow	< 10mm
* Sagging	> 10mm, No Tearing at above 10mm sagging
* Operating Temperature	150~160℃, 30min

Application Method

1. Remove the release paper from the product and attach it to the desired location
2. If there is excessive rust preventive oil or dust on the attachment position, it is recommended to apply it after removing it cleanly.

Storage method (storage conditions)

1. Storage temperature Below 30℃
2. Validity 90 days from date of manufacture
3. This product contains many chemical materials. When exposed to direct sunlight and high temperature for a long time, deterioration of physical properties. Therefore, it should be stored away from heat sources and direct sunlight.
In addition, thorough first-in-first-out is required depending on the storage period.

Additional Information

All of the above information is based on our knowledge and experience. we recommend to carry out sufficient reviews with us about using beyond technical purpose.

Product Category

PSN	Type
3051	Linear type
3052	Specific shape type