


DASH, DOOR, etc. For the soundproof and anti-vibration products of degreased coated surfaces


Product overview

Shinsung's 3070 product line is based on ASPHALT. It is used for the degreased coated surface such as DASH, DOOR of automobile, Soundproofing and dustproofing are main purposes. It is an ultralight pressure sensitive adhesive treatment type.

Product Model

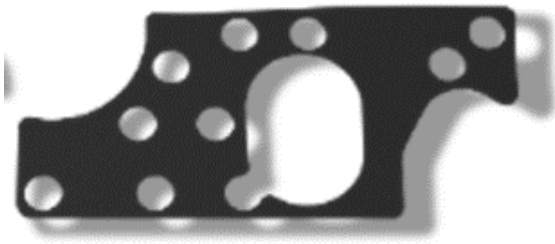

Product Model

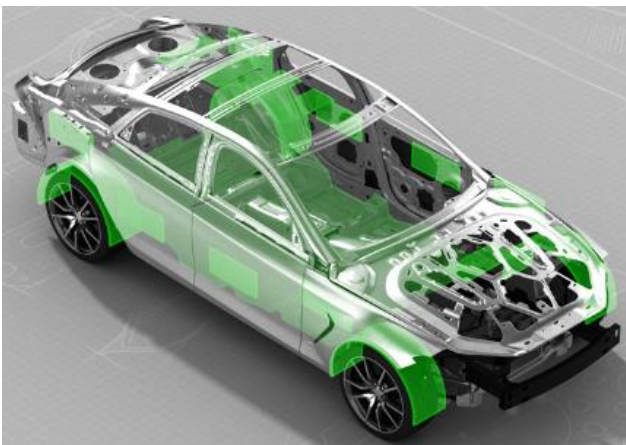

Technical Data

* Appearance		Solid
* Color		Black
* Specific Gravity		0.90 ~ 1.00
* Shrinkage Ration(%)		< 2.0%
* Adhesion Strength	Befor Curing	> 0.25 kg/cm ²
	Aftre Curing	> 0.60 kg/cm ²
	Water resistance	> 0.60 kg/cm ²
* Operating Temperature		150~160℃, 30min

Application Method

1. Remove the release paper from the product and attach it to the desired location
2. If there is excessive rust preventive oil or dust on the attachment position, it is recommended to apply it after removing it cleanly.

Storage method (storage conditions)

1. Storage temperature Below 30℃
2. Validity 90 days from date of manufacture
3. This product contains many chemical materials. When exposed to direct sunlight and high temperature for a long time, deterioration of physical properties. Therefore, it should be stored away from heat sources and direct sunlight. In addition, thorough first-in-first-out is required depending on the storage period.

Additional Information

All of the above information is based on our knowledge and experience. we recommend to carry out sufficient reviews with us about using beyond technical purpose.

Product Category

PSN	Type
3071	Linear type
3072	Specific shape type