


*TAPE-type products with impact resistance, high durability, light weight of body by low specific gravity, and rigidity increasing function*


**Product overview**

Shinsung's 4010 product line is a TAPE type product made of EPOXY as a main material. It passes through automobile oven process and is cured. It is applied between QTR PNL and INR such as passenger cars and vans, has structural adhesion by surface adhesion, and a reinforcing and bending prevention function.

**Product Model**



**Product Model**

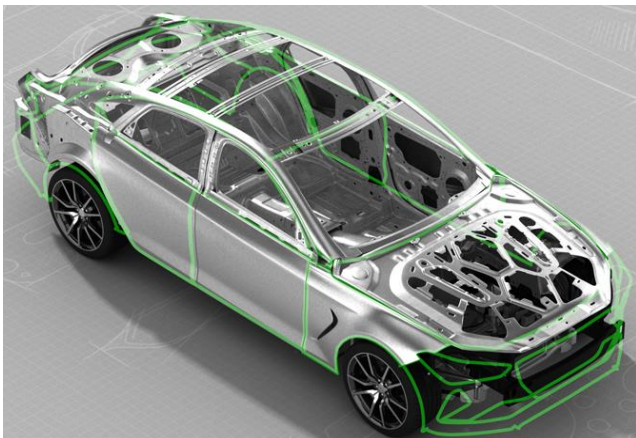

**Product Category**

PSN	Type
4011PT	1-Linear type (PET film)
4011R	1-Linear type (Release paper)

**Technical Data**

* Appearance	Solid
* Color	Black
* Specific Gravity	< 1.2
* T peel strength	100N/25mm
* Shear strength	> 255kg
* Operating Temperature	160~200℃, 20min

**Application Method**

1. Remove the release paper from the product and attach it to the desired location
2. If there is excessive rust preventive oil or dust on the attachment position, it is recommended to apply it after removing it cleanly.

**Storage method (storage conditions)**

1. Storage temperature Below 30℃
2. Validity 30 days from date of manufacture
3. This product contains a curing agent before the reaction.

When exposed to direct sunlight and high temperature for a long time, the self-curing reaction proceeds and deterioration of physical properties.

Therefore, it should be stored away from heat sources and direct sunlight.

In addition, thorough first-in-first-out is required depending on the storage period.

**Additional Information**

All of the above information is based on our knowledge and experience. we recommend to carry out sufficient reviews with us about using beyond technical purpose.